

MA STAR 3.5 A / MA STAR 3.5 S

LIFTING TECHNOLOGY



Illustration: MA STAR 3.5 A

MA STAR triple safety

VP 251230 / VP 251231

Two Post Lift with 3500 kg load capacity

DESCRIPTION:

- 3500 kg load capacity
- Triple safety
- Proven spindle-nut system with self-locking thread and 5 years warranty ¹⁾
- Asymmetrical columns turned by 45° for generous door opening angle (MA STAR 3.5 A)
Asymmetrical support arms
- Symmetrical columns for reduced overall width (MA STAR 3.5 S)
Symmetrical support arms
- Short support arms with 180° swivel range (MA STAR 3.5 A)
- Variable installation width
- Paint coating RAL 7040 window grey (columns), RAL 7016 anthracite grey (support arms)

¹⁾ Please note the detailed warranty terms included in the operating instructions.

STANDARD DELIVERY:


- 2 asymmetrical columns with control panel at operating column (MA STAR 3.5 A)
- 4 asymmetrical support arms (2 double, 2 single telescopic) (MA STAR 3.5 A)
- 2 symmetrical columns with control panel at operating column (MA STAR 3.5 S)
- 4 symmetrical support arms (double telescopic)
- 4 support discs (plug-in system)
- Cable bridge
- Spindle oil (0.25 l)
- Operating instructions
- Transport packaging

ACCESSORIES:

VZ 990488	Energy set: 1x compressed air, 2x 230 V
VZ 971590	Additional control panel at opposite column
VZ 990489	Energy set at opposite column
VZ 971591	Holder for impact wrench
VZ 971592	Document holder
VZ 971593	Tray for support extender (1 pcs), at column
VZ 971224	Tray for support extender (2 pcs), at wall
VZ 971104	Light barrier to prevent contact with ceiling
VZ 971539	Tool tray, magnetic (2 pcs)
VZ 971346	Special support for AUDI TT/TTS/TT RS (4 pcs)
VZ 971247	Support disc Ø 100 mm (4 pcs)
VZ 971220	Support disc extender 50 mm (2 pcs)
VZ 971221	Support disc extender 100 mm (2 pcs)
VZ 971222	Support disc extender 150 mm (2 pcs)
VZ 971223	Support disc extender 200 mm (2 pcs)
VZ 975050	Non-skid device for vehicles with longitudinal frame
VZ 971111	Lashing straps as tilt protection for gearbox removal (2 pcs)
VZ 971227	Prism support MB G-class, without tread plate (4 pcs)
VZ 971520	Prism support MB G-class, with tread plate (4 pcs)
VT 998047	Transport of two post lift, 1-4 pcs
VT 998048	Transport of two post lift, 5-9 pcs
VT 998049	Transport of two post lift, 10 or more pcs
VM 995024	Installation of two post lift, electrom.
VM 996072	Installation of ceiling light barrier
VM 999079	Installation material, injection system (MA STAR 3.5 A)
VM 999080	Installation material, injection system (MA STAR 3.5 S)

TECHNICAL DATA / MA STAR 3.5 A


Load capacity CE	3500 kg
Swivel range of short support arms	180°
Swivel range of long support arms	95°
Raising time (load-dependent) approx.	40 s
Lowering time (load-dependent) approx.	40 s
Drive power	2 x 3.0 kW
Power supply	3/N/PE 400 V 50 Hz
Fuse gG	16 A
Net weight without packaging	650 kg
Shipping dimensions (L x W x H)	? x ? x ? mm
Required concrete quality	C 20/25
Required minimum concrete slab thickness without screed	180 mm

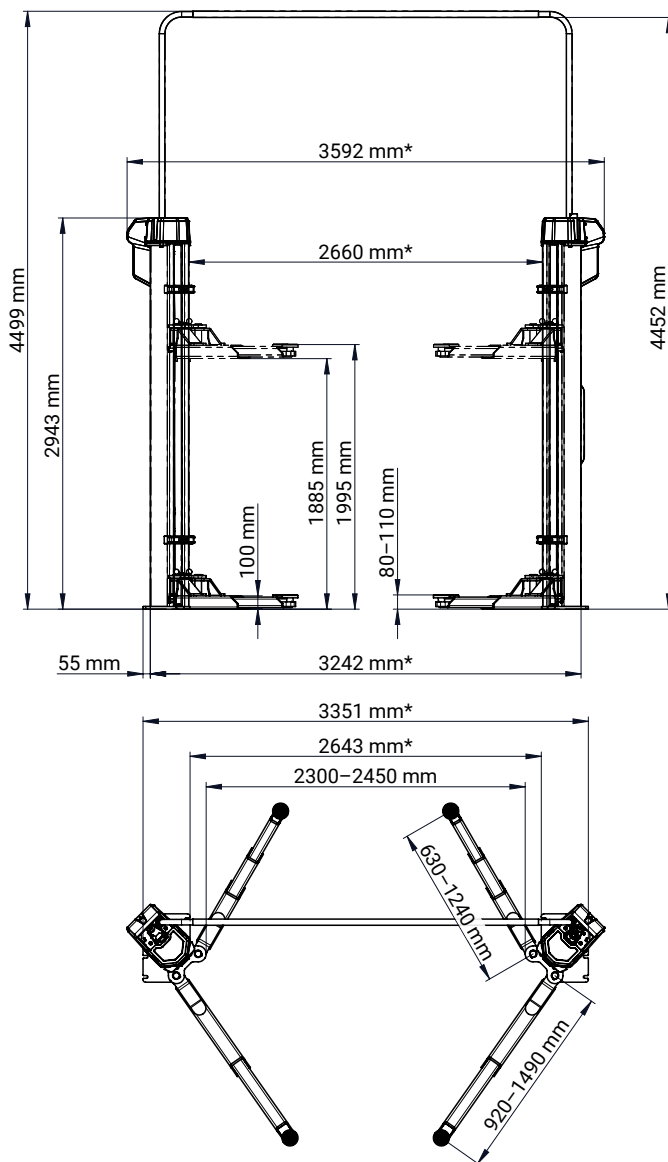

*Dimensions refer to recommended drive-through width of 2400 mm

TECHNICAL DATA / MA STAR 3.5 S

Load capacity CE	3500 kg
Swivel range of support arms	95°
Raising time (load-dependent) approx.	40 s
Lowering time (load-dependent) approx.	40 s
Drive power	2 x 3.0 kW
Power supply	3/N/PE 400 V 50 Hz
Fuse gG	16 A
Net weight without packaging	635 kg
Shipping dimensions (L x W x H)	? x ? x ? mm
Required concrete quality	C 20/25
Required minimum concrete slab thickness without screed	180 mm

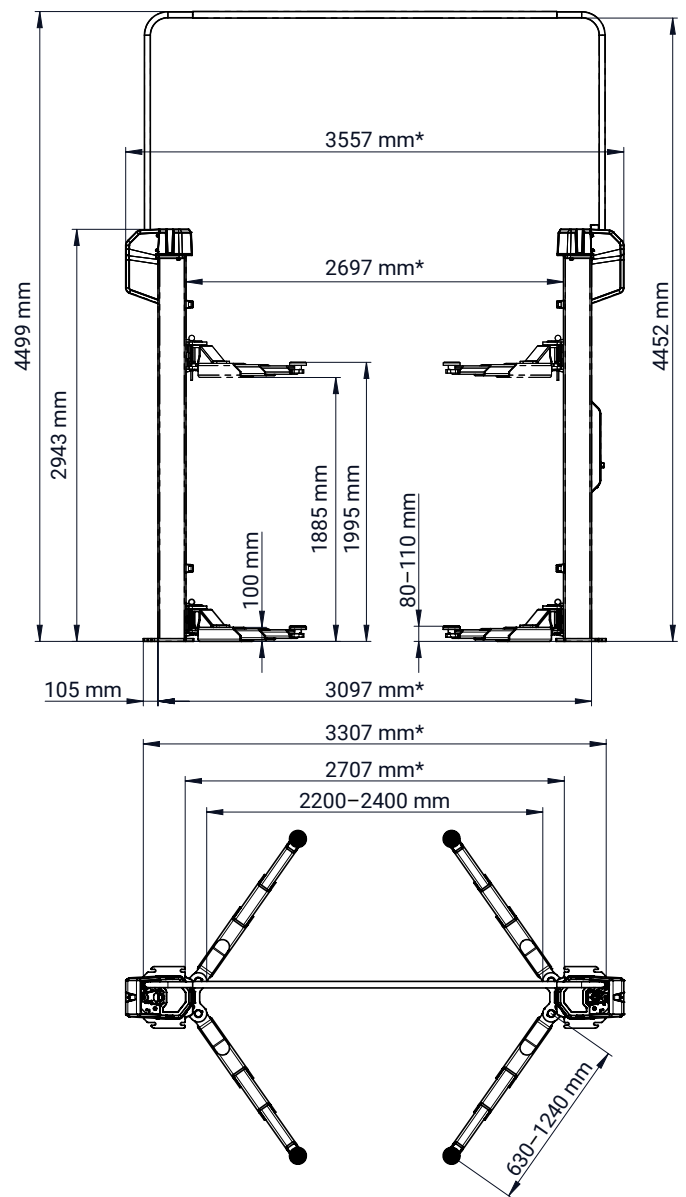

*Dimensions refer to recommended drive-through width of 2400 mm